


PAGE 1 of 3


T3 EASI-PIC Assy 05-08-2014

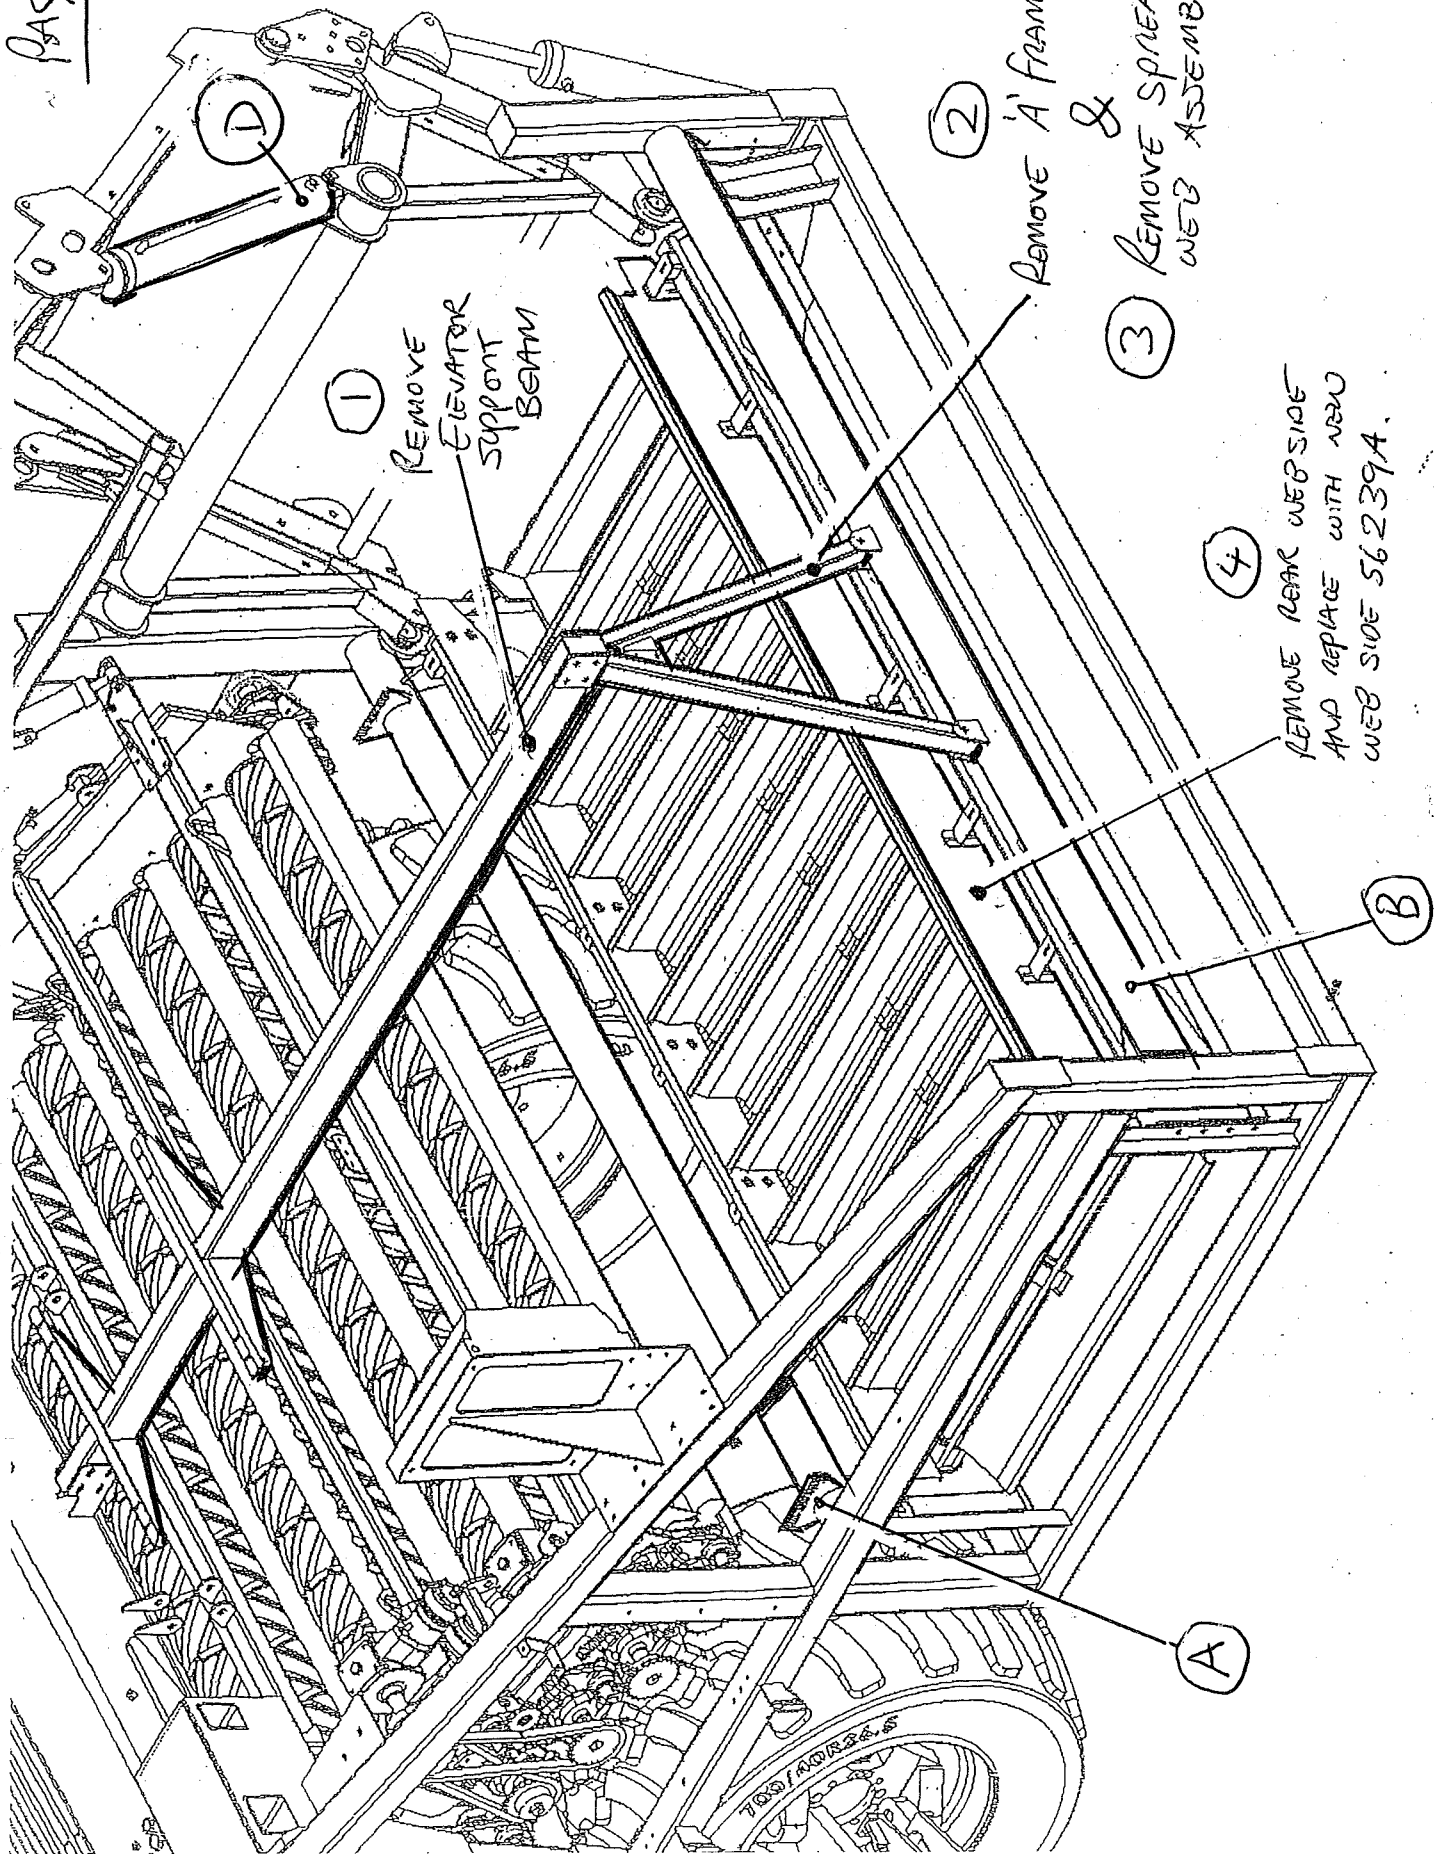



PAGE 2 OF 7

T3 EASI-pic Assy 05-08-2014

5
MOUNT EASI-PIC UNIT
OUTSIDE LUGS AT (A)
AND ONTO TUBE
AT (B).

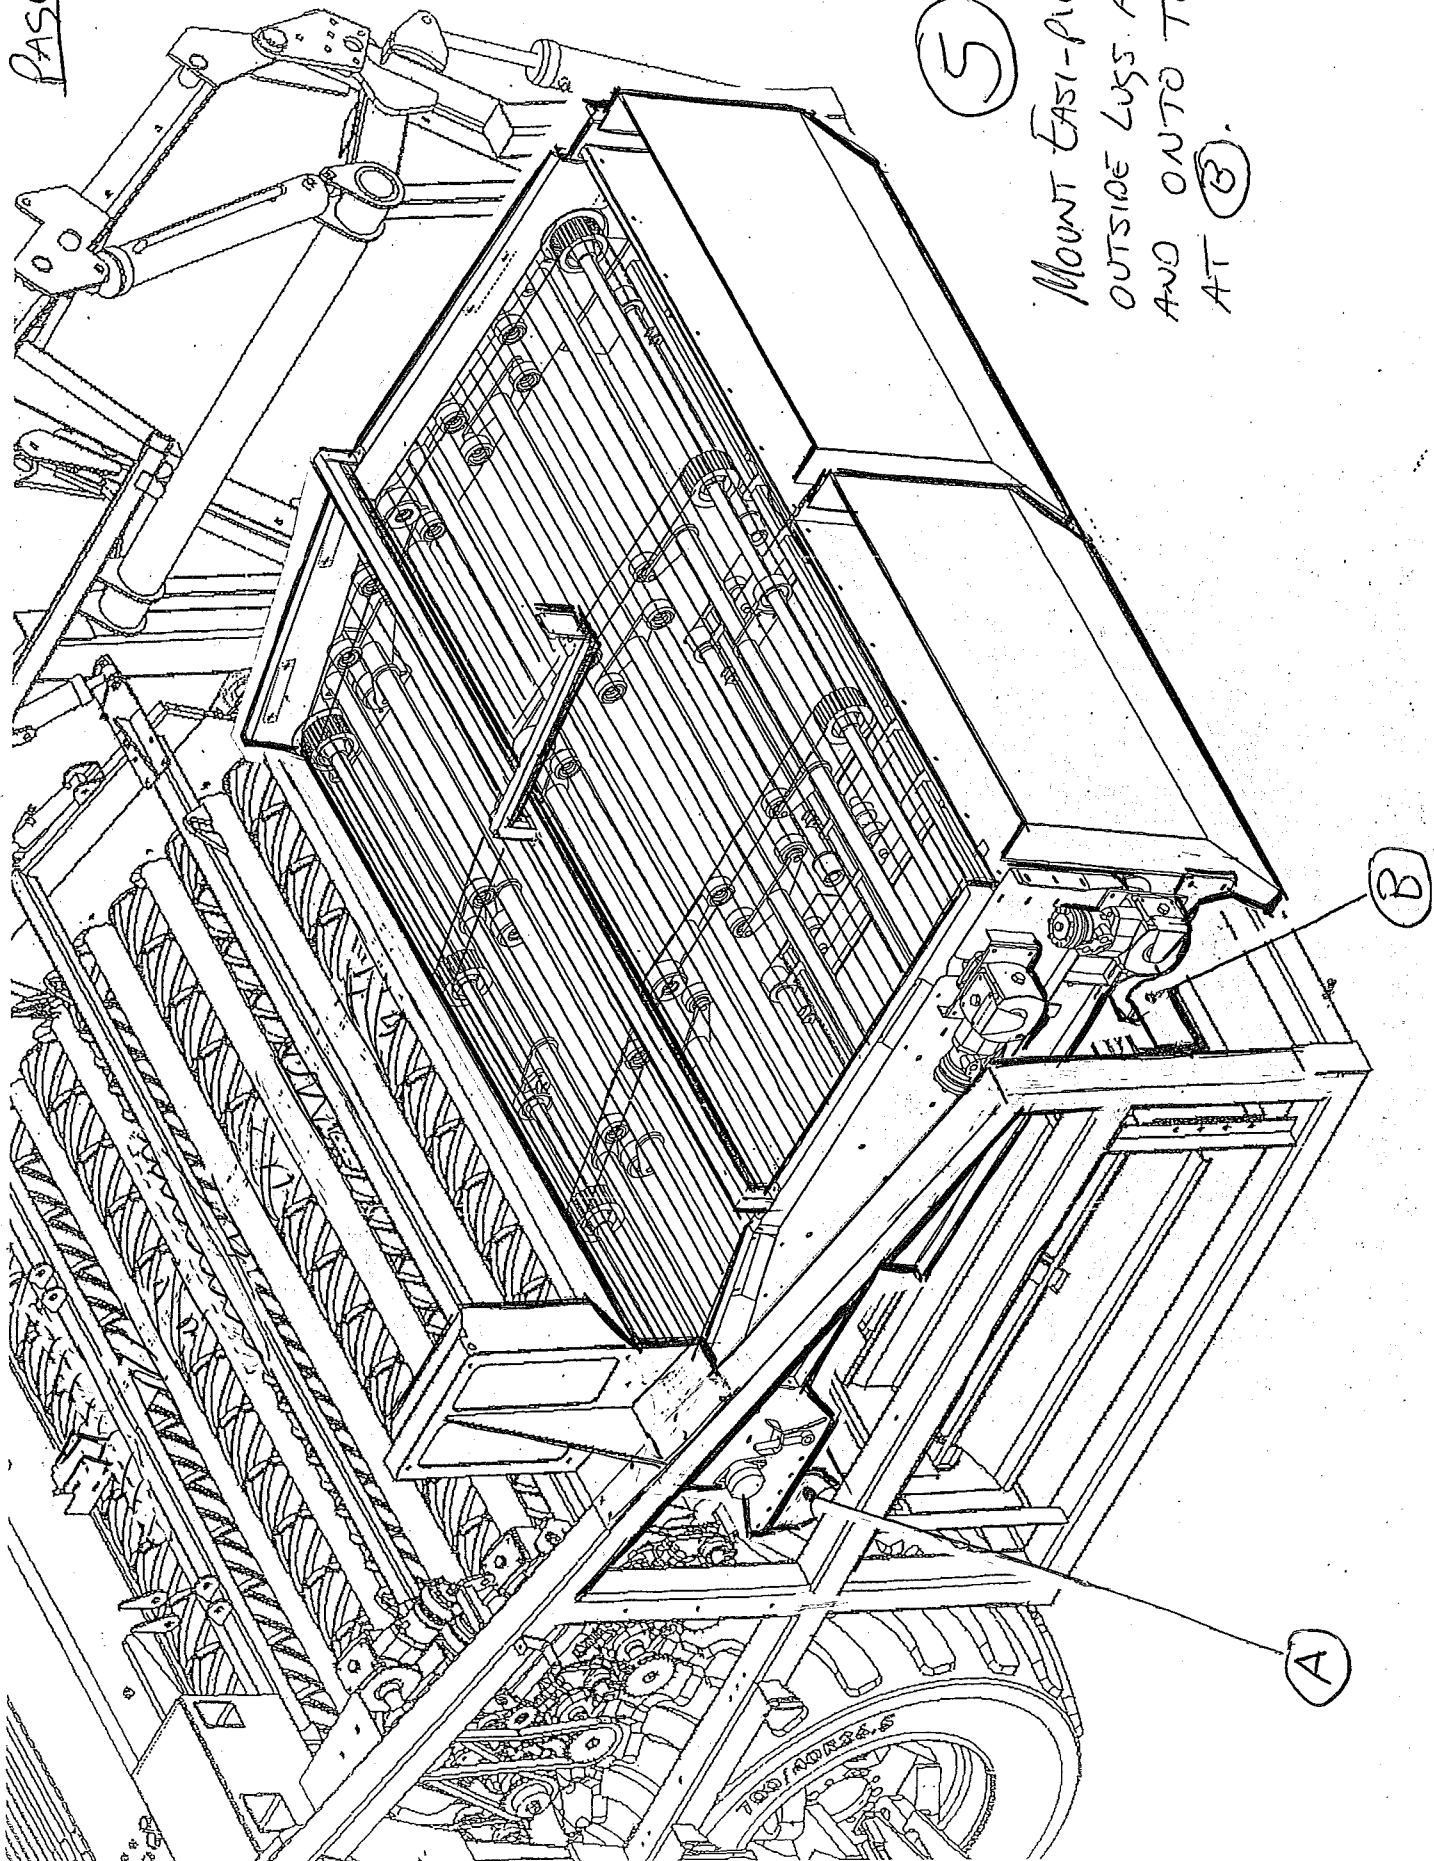


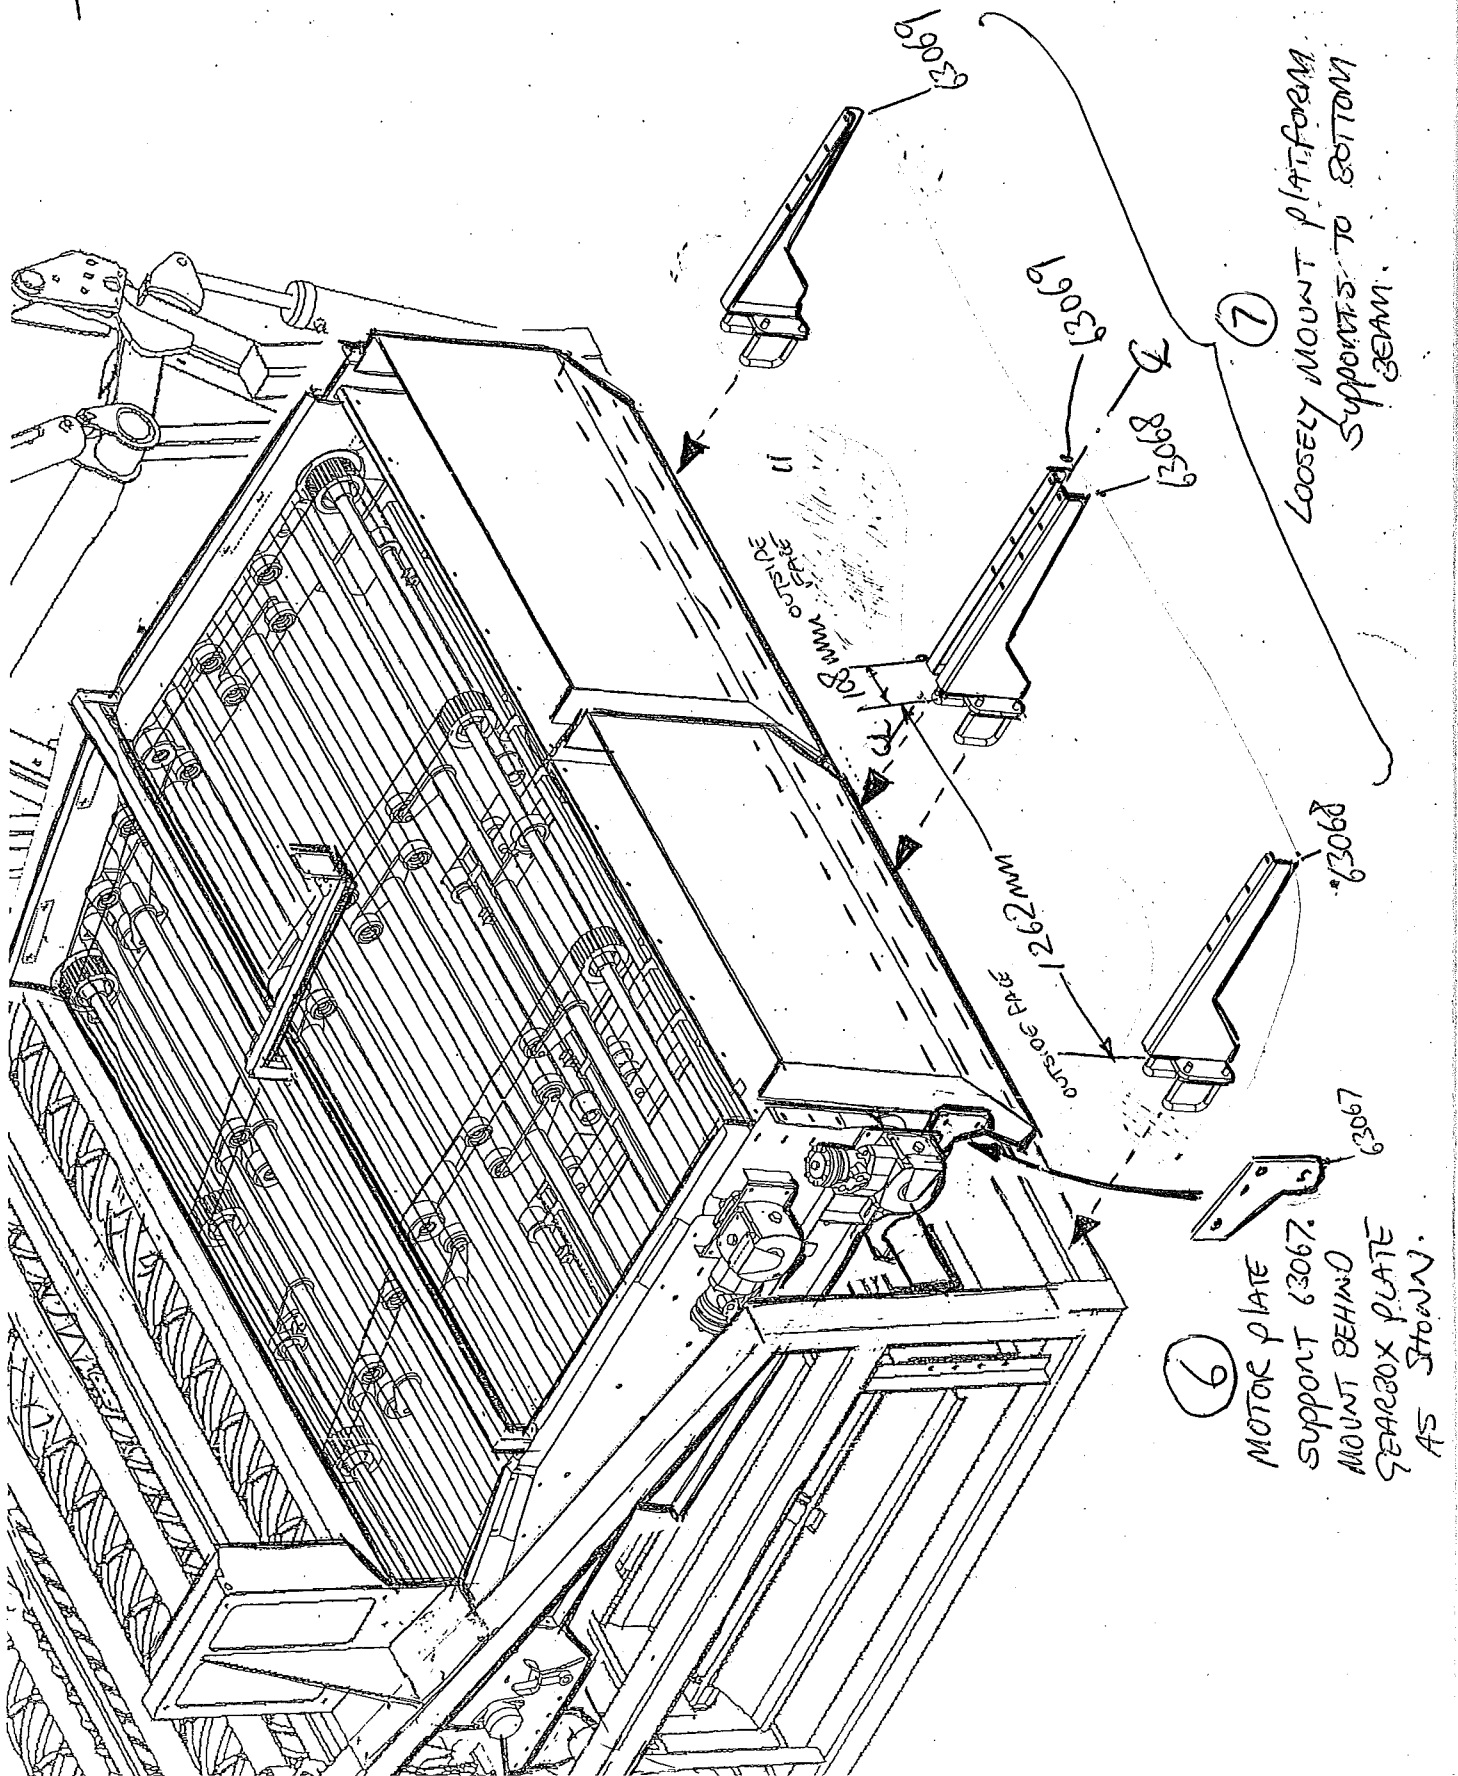

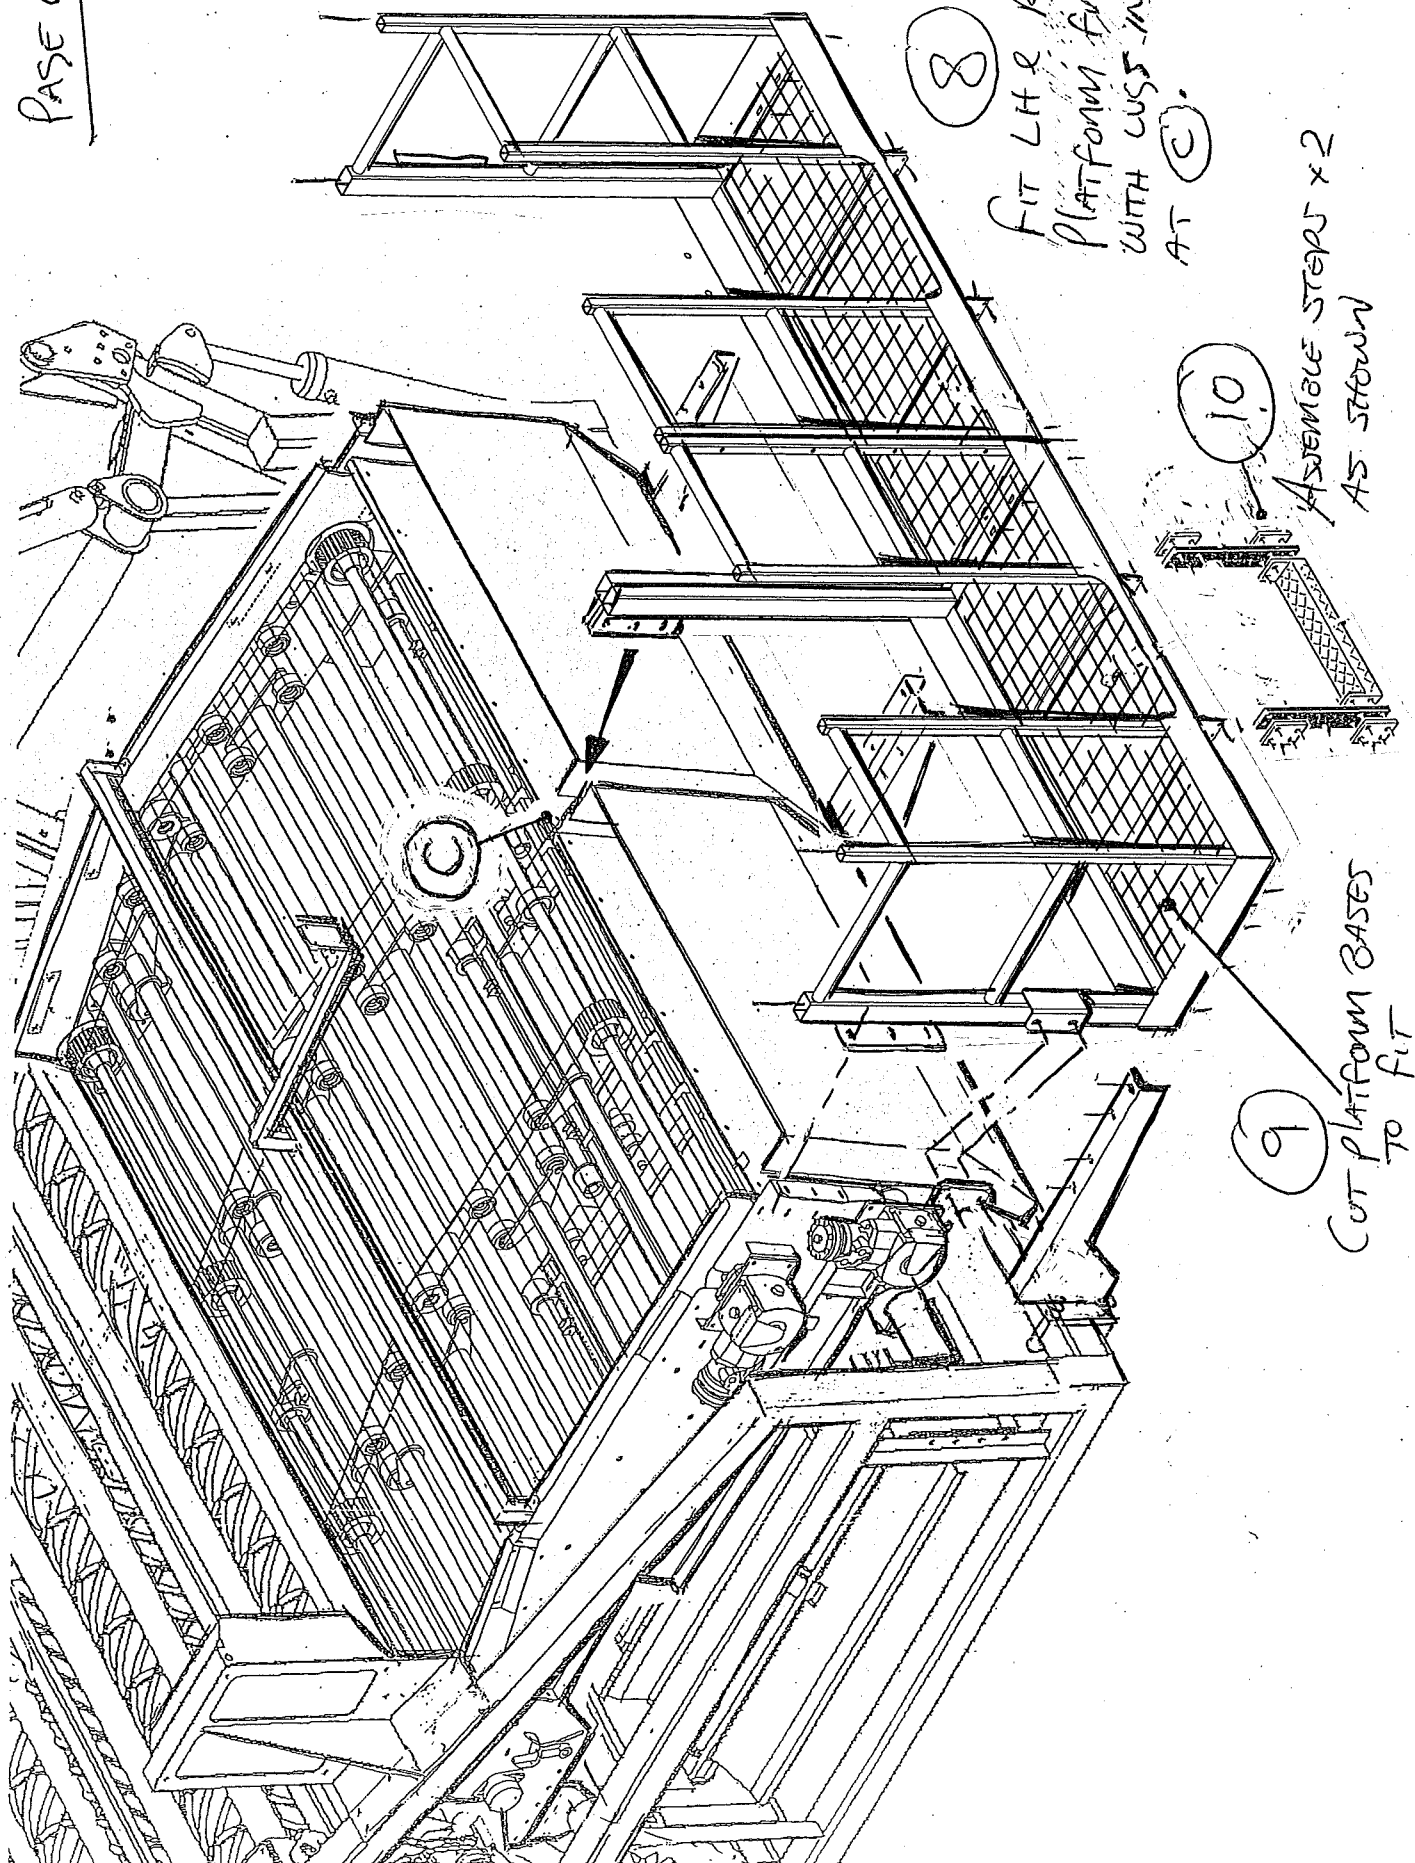

PAGE 5 of 7

T3 EAST-PC ASSY 05-08-2014
CANOPY

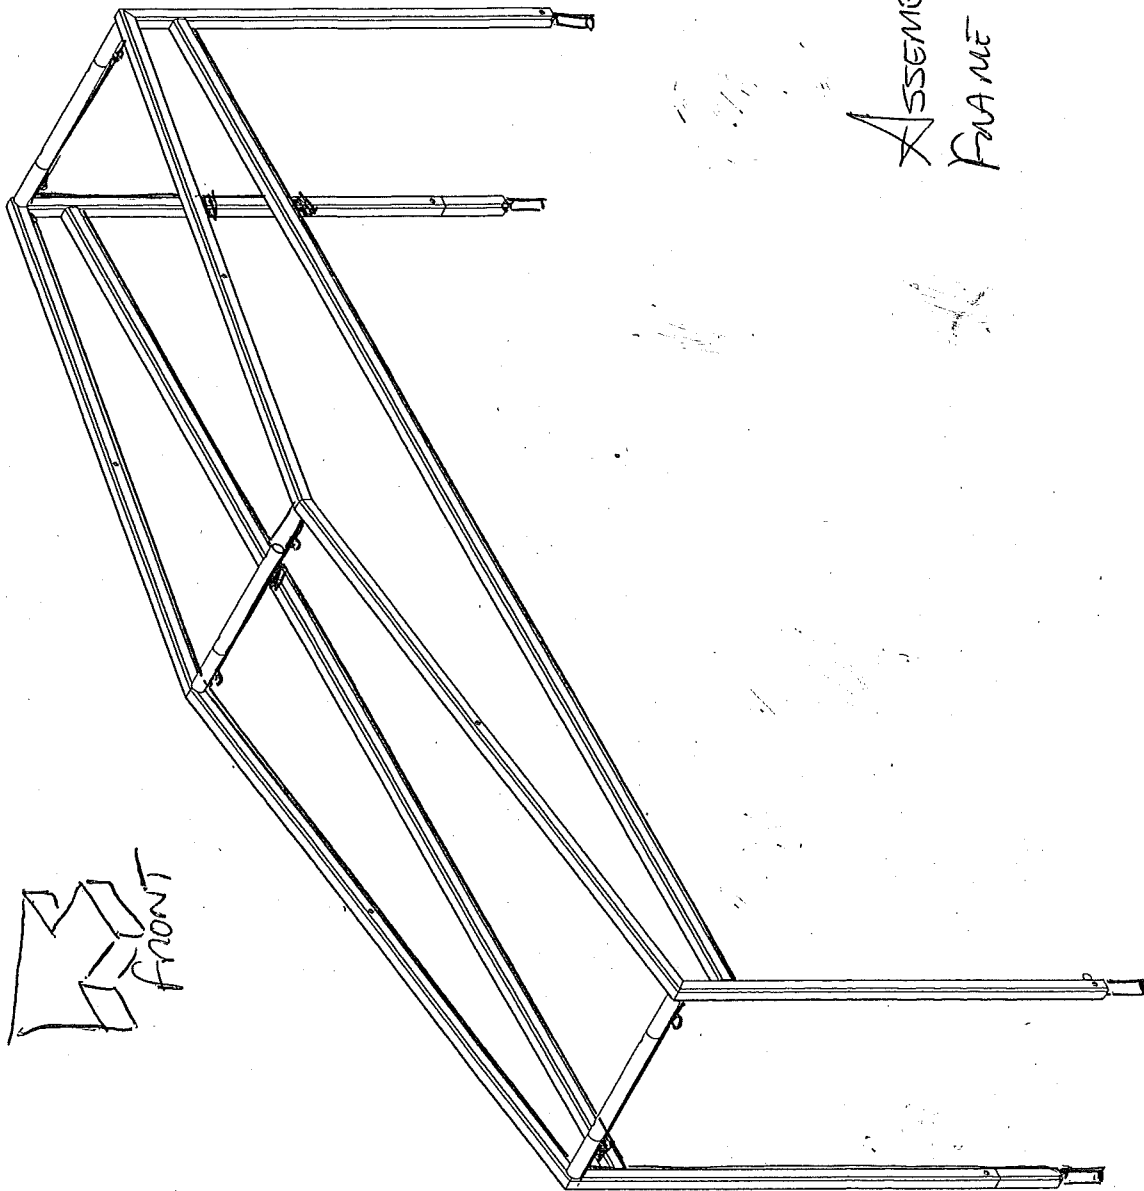


front

1.1

ASSEMBLE CANOPY
FRAME AS SHOWN

HYDRAULICS

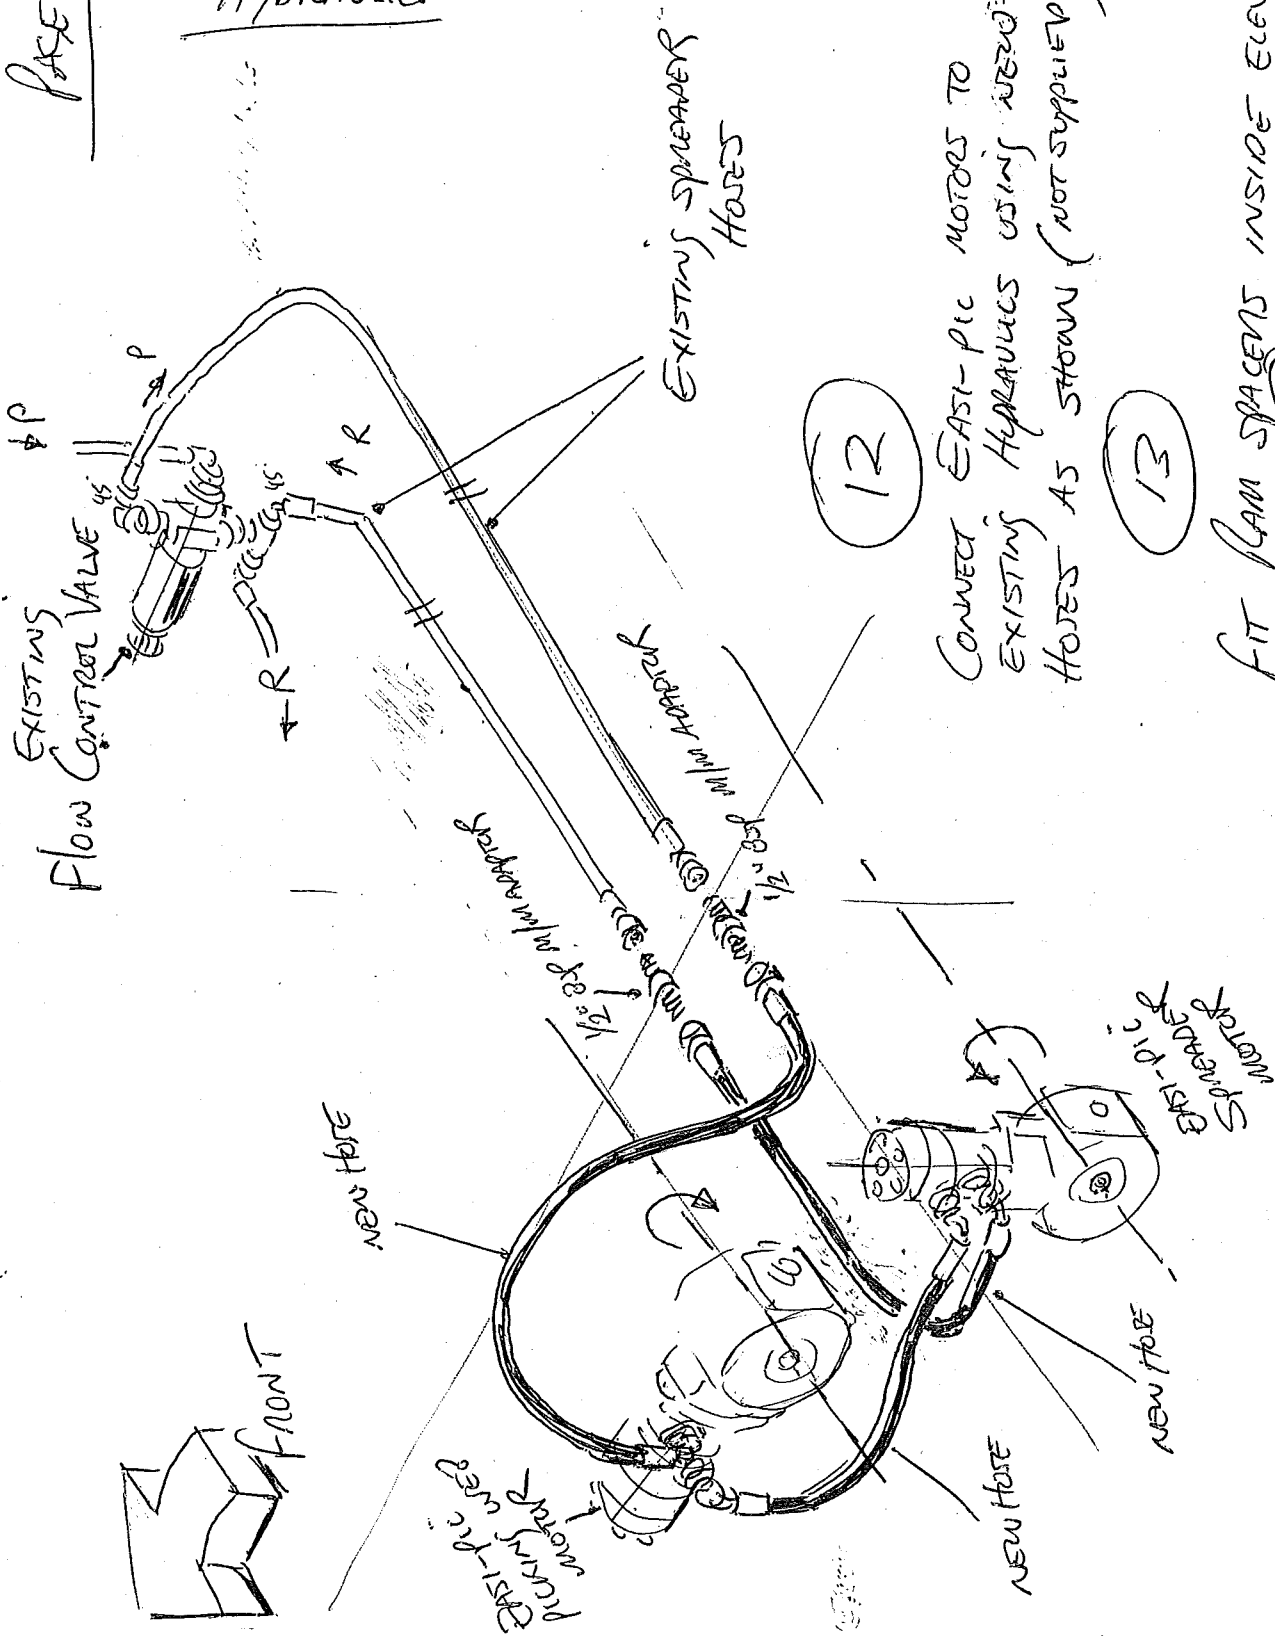

CONNECT EASI-PIC MOTORS TO
EXISTING HYDRAULICS USING ZERO
HOSES AS SHOWN (NOT SUPPLIED).

fit beam spacers inside elevator
four beams (D) (page 1) to increase
closed centres.

2

M

EASI-pic CONTROL BOX CONNECTION TO DISTRIBUTION BOX.

