


image not found or type unknown

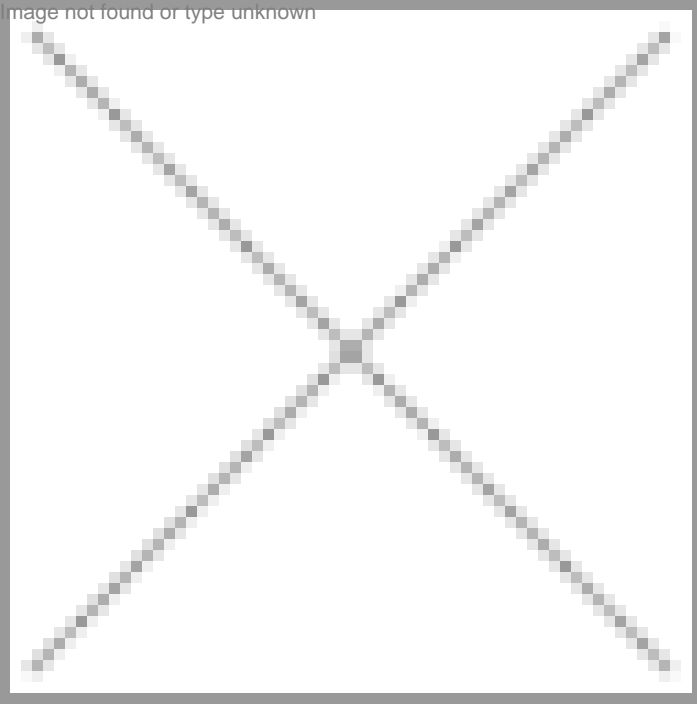

**Telephone** +44 (0) 1353 661111  
**Fax** +44 (0) 1353 662370  
**Email** [sales@standen.co.uk](mailto:sales@standen.co.uk)

# Standen Powavator Rotavators

## Standard Machine Features:

Oil immersed gear side drives

Strong shearbolt legs

Heavy duty gearboxes, speedset with changeable gears for different rotor speeds (esc 400 series) or TOURQUE + Heavy Duty Fixed Speed

Heavy Duty Rotors

## Optional Machine Features:

Convex bodies with bolt wear strips

Auto-reset MD legs

Choice of rotors: Speed blade, L Blade, Stubble Rotor, Spike Tine, Rapid Pin Fixing (Speed or L Blade only), Single Bolt fixing (Speed or L Blade only)

Depth wheels

Bed forming hoods (to enable planting directly behind tiller)

## Models:

Powavator Model	Bed Widths	Max Tractor HP	Rigid / Hydraulic / Folding	Rotor Type Available
150/70	1 bed of 1.8m	170	Rigid	All
150/80	1 bed of 2m	170	Rigid	All
400/70/70	2 beds of 1.8m (1 each side of tractor)	400	Folding	All
400/140	2 beds of 1.8m	400	Folding	All
400/200	3 beds of 1.8m	400	Folding	All
400/240	3 beds of 2.0m	400	Folding	All
150/70 Front mounted incorporator	1 bed of 1.8m	170	Rigid	Stubble Rotor

150/95 Front mounted incorporator	1 bed of 2.4m	170	Rigid	Stubble Rotor
-----------------------------------	---------------	-----	-------	---------------